


WARNINGS

- **Battery MUST be in ON position when charging (Fig. 1).**
- Do not modify or disassemble the battery pack.
- Do not allow the battery pack to come in contact with fire or water.
- Do not charge the battery with any charger other than that supplied in this kit: DO NOT use the compressor AC adapter to charge battery.
- To prevent deterioration or damage of the battery DO NOT drop or subject to physical shock.
- Do not place the battery pack on flammable materials (such as in the bed or carpets) during charging.

Figure 1 Battery switch
OFF = "O" and ON = "I."



Spare parts and replacement batteries are available from your supplier or directly from ConidioTec. Contact us directly if you experience any problems with this equipment.



Questions? View our online documentation and tutorials at www.aprehend.com or call us at 800-891-8610.

Aprehend®

Biological bed bug control

www.aprehend.com
800.891.8610



ConidioTec

Natural Urban Pest Control

www.aprehend.com
800.891.8610
Doc.# 30-100-50719

Aprehend®



Rechargeable Lithium Battery

ConidioTec Part# 30114 • Model YB1203000

IMPORTANT

Please read and follow battery charging and use instructions carefully.


Package Contents:

- A** (1) DC 12V 3000mAh Li-Ion Battery Pack Model YB1203000
- B** (1) Dual DC5521 Battery to Compressor Cable (compressor sold separately)
- C** (1) 12.6V/0.5A AC/DC Charger Model KY-12V61 (input 100-240V ~ 260mA)
(1) User manual

*DO NOT use these instructions for the battery pack model HBJ 12260.


LED INDICATORS

There are 5 LED battery-strength indicators.

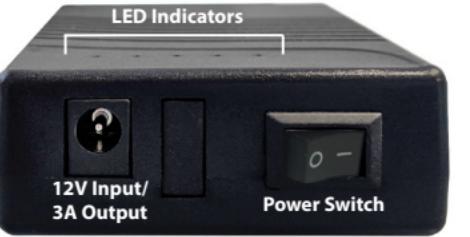

1 or 2 green lights:

Do not run the compressor. Recharge battery prior to use, or product application will be compromised.




3, 4, or 5 green lights:
Sufficient charge to run compressor.

CHARGING THE BATTERY



Battery must be in the ON position when charging.



Do NOT use the compressor AC adapter to charge the battery. Damage to the battery will occur.



NOTES & TIPS

- The battery comes partially charged. Apply a topping charge for 2–3 hours before use.
- To ensure long battery life do not discharge completely.
- Recharge the battery every 3 months when not in use. Never leave the battery in the discharged state for long periods.
- All lithium-ion rechargeable batteries are consumables and have a limited lifespan. Capacity and performance will decline over time. Contact us for replacement units.
- It's a good idea to have at least one spare battery and rotate their use to ensure consistent work flow.

- Recharge battery frequently.
- The compressor has an auto-off feature: when the gun is connected via the air hose, the compressor will run to reach optimum spray pressure, then rest until the trigger button on the gun is depressed. Battery consumption during auto-off rest is minimal. However, always turn the battery off between jobs to preserve battery life.
- The battery is designed for a slow charge process (8 ~ 10 hours for full charge). An extended, uninterrupted, complete charge extends battery life.

Using the wall charger

- Connect the battery to the charger and place the switch on the battery to the ON position "I".
- Connect the charger to the wall outlet. A **RED** light indicates that the battery is charging. When the battery is fully charged, the **GREEN** light will illuminate.
- Disconnect the charger, and switch the battery to the off position "O" until use.



Using the car charger

- Connect the battery to the charger and place the switch on the battery to the ON position "I".
- When plugging the car charger into the car socket (without the battery attached), the light will be **GREEN**.
- When the battery is attached, the charger light should change to **RED**.
- When fully charged, the light will illuminate **GREEN**.



Note: the car charger is supplied with the sprayer kit but not with replacement batteries. To obtain a car charger, order ConidioTec part# 30116.